

DISPLAY AREA -----

A 601mm, B 7222mm, C 1749mm, D 1114mm

OVERALL SIZE

Sections 1, 2, 3 and 5 measure 653mm deep, 1527mm wide with an additional 12mm UNPRINTED overlap on the right-hand edge of sections 1, 2 and 3.

Section 5 will require an additional 12mm UNPRINTED overlap on the left-hand edge.

Section 4 measures 180mm deep, 1166mm wide with no overlaps. Section 4 must be produced in one piece.

The + Panel measures a maximum of 1090mm deep, 765mm wide with an additional 75mm PRINTED overlap on the left-hand edge. The + Panel must be supplied die-cut to shape.

CBS OUTDOOR WILL REFUSE TO ACCEPT ANY DELIVERIES THAT DO NOT CONFORM TO THESE SPECIFICATIONS

DELIVERY DEADLINE AND POSTING CYCLE

Posters must be produced to the exact specification set out below and delivered 14 calendar days before the 'In-charge' date of the campaign. Campaigns are then posted on a 6 calendar day cycle (excluding Bank Holidays) which commences before the 'In-charge' date.

Please note: CBS Outdoor is not liable for compensation claims against any campaign where posters have been received after the delivery deadline. All posters received after the delivery deadline will not be posted until the next available posting cycle for this site type.

COPY APPROVAL

Before posting can commence, every Bus campaign must be submitted to CBS Outdoor for copy approval. This is to ensure that the Codes of Practice outlined by our franchise partners are being upheld. See **Copy Approval** on page 5.

BARCODING

Every campaign must have the appropriate barcode printed on all posters. See **Barcoding of Bus Campaigns** on pages 6 and 7.

SAFETY IN DISPLAY

Because the stem panel in T-Sides can, in some conditions, bow out of shape we are using a clear, plastic, fixing-stud to ensure safety. The stud measures 6cm in diameter and is positioned in the exact centre of section 4 as indicated in the line drawing.

DISPLAY AREA

For all site types that are fixed into frames, the specification will give the Overall Size and the Display Area. Please keep all important text and images within the Display Area but feel free to bleed the background colours/images up to the Overall Size. Please be aware that if an artwork has text that has been created to the Display Area it will butt-up to the frame. If this is not the desired effect then please move the text even further inside the Display Area.

Please note: CBS Outdoor strongly recommends that you do not use the frame as a 'cropping device' for corporate logos as 100% accuracy cannot be guaranteed due to the fact that not all buses are framed.

+ PANEL

The + Panel measures a maximum of 1090mm deep x 765mm wide and must be created as a solid, die-cut, extension of the T-Side artwork and not used simply as an additional, rectangular, printed panel.

T-SIDE FRAMES

The majority of T+ campaigns will be installed onto buses that carry an existing T-Side frame. To overcome any installation difficulties, CBS Outdoor insists that the following guidelines are observed:

1. The + Panel will only be permitted to extend from the right-hand side of the 'stem' section.
2. Do not place text and logos over the framed area, this will negate the risk of distortion.

MATERIALS and PRINTING

Please refer to pages 3 and 4 for full details.

PROTECTIVE FINISH

For maximum durability on long-term campaigns, CBS Outdoor insists a clear machine or UV varnish should be applied to the poster.

CBS OUTDOOR POSTER DESPATCH FORM

The CBS Outdoor Poster Despatch Form will give all the relevant information for each campaign with regard to quantities, collation details and delivery addresses. If you require a copy, please contact the CBS Outdoor Customer Service department on 020 7482 3000 and quote the campaign reference.

SPARE POSTERS

CBS Outdoor will always require additional 'spare' posters to refurbish campaigns. The quantities shown on the CBS Outdoor Poster Despatch Form will include the required number of spares.

OVERLAPS

The CBS Outdoor Poster Despatch Form will also indicate which posters are to be delivered 'rolled & collated' and which are to be delivered 'flat & uncollated'. Please remember that all 'rolled & collated' posters will require the appropriate overlaps and all 'flat & uncollated' posters must have the overlaps removed. All overlap information can be found with the line drawing at the beginning of this specification.

TRIMMING

All posters must be trimmed to the exact Overall Size with additional UNPRINTED overlaps where necessary.

POSTER COLLATION AND PACKING

Posters will need to be delivered in a combination of 'rolled & collated' and 'flat & uncollated'.

Rolled & collated: Please collate and roll the 'banner' sections along with the die-cut + Panel in the following sequence; 1, 2, 3, 5 and + Panel, with the design out. Then roll the collated sections inside section 4, again with the design out. Deliver the posters wrapped in packages of no more than 10, ensuring the edges are fully protected to avoid damage in transit. Folded vinyls cannot be accepted.

Flat & uncollated: Please stack posters flat on a pallet. Section 4 should be placed on the pallet first and a tab must be inserted between every 50th vinyl. Section 5 should then be placed on top of section 4 followed by sections 3, 2 and 1. Finally, the + Panel must be placed on top of section 1. Again a tab must be inserted between every 50th vinyl and an additional tab inserted indicating the break between each section. The pallet must be bound securely, ensuring the poster edges are fully protected to avoid damage in transit.

POSTER LAYOUTS

A poster layout must be attached to every package or pallet.

QUALITY ASSURANCE DOCUMENTATION

All deliveries will require documentation giving details of Quality Assurance Checks. This must clearly identify the following information: campaign reference(s), print method, ink details and drying method. CBS Outdoor will also require the name of the person who carried out the Quality Assurance Checks for that particular consignment.

DELIVERY NOTES

Every consignment of posters delivered must have a Delivery Note attached indicating the advertiser, the number of designs, a title for each of the designs and the quantity of each design.

POSTER DELIVERY ADDRESSES

CBS Outdoor is not responsible for the delivery of your posters. Please contact CBS Outdoor Customer Service on 020 7482 3000 for the Poster Despatch Form.

CHANGES OF DESIGN

Charges for changes of design are available on request and subject to written agreement from both parties.

Fixing costs are not subject to Agency or Specialist commission.

Exact dates for changes of design are subject to posting cycle workload. Please contact your Account Manager or CBS Outdoor Customer Service on 020 7482 3000 for more details.

DISPOSAL OF SPARE POSTERS

Please notify CBS Outdoor Customer Service in writing if you wish to retain spare posters after a campaign has ended. A small storage charge will be made. Otherwise posters will be disposed of 10 days after the campaign has ended. CBS Outdoor, Camden Wharf, 28 Jamestown Road, Camden, London NW1 7BY.

GENERAL NOTES

- Permanent adhesives and materials with unmarked backing sheets will not be accepted.
- Posters printed on any photographic or reflective materials cannot be accepted. CBS Outdoor will also refuse to accept any poster produced with Pre-spaced Vinyl Cut Lettering.

DIGITAL - Solvent

VINYL and OVER-LAMINATE

Please use 100 micron removable self-adhesive vinyl of the following make only as it has been tested and approved by CBS Outdoor:

EVERETT DENNISON IPMI 7112 or the **MPI-300I** range with a **DOL 3000 Over-laminating Film**.

All posters must be over-laminated, failure to do so will result in a deterioration of the printed surface.

INKS

When digitally-printing onto the approved vinyl with solvent-based inks, CBS Outdoor recommends the following ink ranges, all of which are suitable for transport advertising:

SERICOL - Colour+ Solvent Digital Ink Systems. This ink range is compatible with a wide range of large-format, solvent-based, digital print machines. Please go to www.fujifilmsericol.co.uk for more details and Information Sheets. **SUN CHEMICALS – Streamline Superwide Format**. This ink range is compatible with a wide range of large-format, solvent-based, digital print machines. Please go to www.sunchemical.com for more details and Information Sheets.

HEAVY INK COVERAGE

The over-loading of ink in solid areas of colour must be avoided. This should be accomplished by adjusting your RIP software settings so that 'Ink Limiting' is set to a maximum of 200%. This should still allow enough ink saturation to give a good colour gamut without too much ink being laid down.

CURING

Each individual poster must be allowed to 'cure' before being over-laminated, trimmed and collated ready for despatch. CBS Outdoor insists that all digitally-printed posters must be allowed to 'cure' for at least 24 hours after printing.

Incompatibility between the vinyl, ink and curing method will cause a reduction in the vinyl's durability and result in problems with 'scratching', 'curling', 'stretching' or 'embrittlement', this in turn, will result in vinyl failure. Each vinyl, ink and curing combination should be thoroughly tested for suitability before commencing with poster production. For more advice please contact the vinyl and ink manufacturers. CBS Outdoor will not accept responsibility for vinyl failures that may occur due to vinyl, ink or curing incompatibilities.

DIGITAL – UV

VINYL and OVER-LAMINATE

Please use 100 micron removable self-adhesive vinyl of the following make only as it has been tested and approved by CBS Outdoor:

EVERETT DENNISON MPI-300I range with a **DOL 3000 Over-laminating Film**.

All posters must be over-laminated, failure to do so will result in a deterioration of the printed surface.

INKS

When digitally-printing onto the approved vinyl, CBS Outdoor recommends the following ink ranges, all of which are suitable for transport advertising:

SERICOL - Uvijet UV Digital Inks. This ink range is compatible with a wide range of large-format, UV-based, digital print machines. Please go to www.fujifilmsericol.co.uk for more details and Information Sheets. **SUN CHEMICALS – Crystal URR and Crystal UFE**. Both of these ink ranges are compatible with a wide range of large-format, UV-based, digital print machines. Please go to www.sunchemical.com for more details and Information Sheets.

HEAVY INK COVERAGE

The over-loading of ink in solid areas of colour must be avoided. This should be accomplished by adjusting your RIP software settings so that 'Ink Limiting' is set to a maximum of 200%. This should still allow enough ink saturation to give a good colour gamut without too much ink being laid down.

CURING

Each individual poster must be allowed to 'cure' before being over-laminated, trimmed and collated ready for despatch. CBS Outdoor insists that all digitally-printed posters must be allowed to 'cure' for at least 24 hours after printing.

Incompatibility between the vinyl, ink and curing method will cause a reduction in the vinyl's durability and result in problems with 'scratching', 'curling', 'stretching' or 'embrittlement', this in turn, will result in vinyl failure. Each vinyl, ink and curing combination should be thoroughly tested for suitability before commencing with poster production. For more advice please contact the vinyl and ink manufacturers. CBS Outdoor will not accept responsibility for vinyl failures that may occur due to vinyl, ink or curing incompatibilities.

GENERAL NOTES

- Permanent adhesives and materials with unmarked backing sheets will not be accepted.
- Posters printed on any photographic or reflective materials cannot be accepted. CBS Outdoor will also refuse to accept any poster produced with Pre-spaced Vinyl Cut Lettering.

SCREEN

VINYL

Please use 100 micron removable self-adhesive vinyl of the following make only as it has been tested and approved by CBS Outdoor:

AVERY DENNISON FASSON FASCAL Superscreen 100.

INKS

When screen-printing onto the approved vinyl, CBS Outdoor recommends the following ink ranges, all of which are suitable for transport advertising:

**SOLVENT-BASED INKS - SUN CHEMICALS Vynaglaze 4700 series and Flexijet 4800 series.
SERICOL Plastijet TL Trichromatics and Plastijet XG.**

**UV CURING INKS - SUN CHEMICALS Harmony HRN series, Vioflex 4000 series, Solarsilk SLK series and Synergy SRG series.
SERICOL Uviplast HiFlex ES Trichromatics, Uvispeed Multiflash UZ and Aquaspeed Display VQ/YZ.**

PROTECTIVE FINISH

For maximum durability on long-term campaigns, CBS Outdoor suggests a clear machine or UV varnish should be applied to the poster.

Incompatibility between the vinyl, ink and curing method will cause a reduction in the vinyl's durability and result in problems with 'scratching', 'curling', 'stretching' or 'embrittlement', this in turn, will result in vinyl failure. Each vinyl, ink and curing combination should be thoroughly tested for suitability before commencing with poster production. For more advice please contact the vinyl and ink manufacturers. CBS Outdoor will not accept responsibility for vinyl failures that may occur due to vinyl, ink or curing incompatibilities.

LITHO

VINYL

Please use 100 micron removable self-adhesive vinyl of the following make only as it has been tested and approved by CBS Outdoor:

AVERY DENNISON FASSON FASCAL Superscreen 100.

INK and VARNISH

When litho-printing onto the approved vinyl, CBS Outdoor recommends the following ink range and high-rub varnish, both of which are suitable for transport advertising:

UV CURING INK - SUN CHEMICALS Suncure Display Lightfast 4 Colour Set USD70, USD68, USD64 and USD78.

HIGH-RUB VARNISH - SUN CHEMICALS CDV7199.

Incompatibility between the vinyl, ink and curing method will cause a reduction in the vinyl's durability and result in problems with 'scratching', 'curling', 'stretching' or 'embrittlement', this in turn, will result in vinyl failure. Each vinyl, ink and curing combination should be thoroughly tested for suitability before commencing with poster production. For more advice please contact the vinyl and ink manufacturers. CBS Outdoor will not accept responsibility for vinyl failures that may occur due to vinyl, ink or curing incompatibilities.

COPY APPROVAL

Before posting can commence, every bus, rail and tram campaign must be submitted to CBS Outdoor for copy approval. This is to ensure that the Codes of Practice outlined by each of our franchise partners are being upheld.

To view the 'Codes of Practice and Guidelines' visit www.cbsoutdoor.co.uk
Go to the 'Campaign Support' section and click on 'Copy Approval'.

To help in this process and to prevent unnecessary production costs, CBS Outdoor requires a **pdf** of each design used in the campaign as soon as it is available. The **pdf** must show the actual version to be used in the campaign, be legible and show the entire poster.

The **pdf** must be emailed to copy.approval@cbsoutdoor.co.uk
To speed-up the process, please indicate in the 'Subject' field, whether the pdf is for: Bus, London Underground, National Rail, Tram or Belfast.

Alternatively, send a colour hard copy of the design to the following address:

CBS Outdoor - Copy Approval
Camden Wharf
28 Jamestown Road
Camden
London NW1 7BY

Again, please indicate on the front of the envelope whether the hard copy is for: Bus, London Underground, National Rail, Tram or Belfast.

CBS Outdoor assures you of a swift response. Thank you for your co-operation.

**PLEASE NOTE: This address is for Copy Approvals only.
Do not send artworks or finished posters to this address.**

Industry first

CBS Outdoor has introduced the first national, computerised barcoding system which will be used to monitor the bus medium. The system provides instant information about the posting of advertisers' campaigns, bringing greater accountability to the medium.

More accountability

Barcoding gives advertisers accurate information about the fixing and location of their campaigns. The central computer is programmed to automatically verify information and constantly monitor the performance of each fixing team.

Tracking of campaigns

The system consists of a hand-held scanner which the fixers use to read the barcode on the poster and record the bus number. Every campaign has its own unique code. During posting the barcode is scanned and the bus number recorded. The posting information is then down-loaded via modem to CBS Outdoor's database. The database compiles an accurate report of the posting, enabling CBS Outdoor to issue 'Confirmation of Posting' details.

Fast and efficient

The system gives advertisers fast, accurate information about their bus advertising campaign. It utilises the latest barcoding technology to monitor fixing of campaigns on CBS Outdoor's network of fleets. The process uses a fool-proof input system which only permits known site numbers to be input and removes the possibility of incorrect allocation.

Creating the barcode

The barcode can be created on Apple Macintosh Software using a package called 'MacBarcoda', this produces a 'Code 39' type of barcode. Simply enter the number shown above the barcode and the software will create the barcode you require. This barcode can then be imported into your client's artwork document as an EPS or scan.

Colours

Ideally the barcode should be printed in black or dark blue, if this is not possible another dark colour will suffice as long as it is printed onto a light-coloured background, this will enable the hand-held scanner to pick-up the contrast between the two colours. Never print the barcode in red as the scanner does not recognise any shade of red.


Do not print the barcode in a dark colour on a dark background; if this situation arises create a white area, larger than the barcode, in the background colour or image and position the barcode accordingly.

Different site types

CBS Outdoor will issue a different barcode for each site type you are printing. For example, if the campaign involves Supersides, Streetliners and Super Rears, you will receive three different barcodes. If you are producing different combinations of T-Sides i.e. Centre Stem, Off-Centre Stem and Forward Stem, the same barcode can be used for all three configurations.

Positioning the barcode

In order for the system to operate efficiently, barcodes must be placed in the bottom right-hand corner of all posters, 50mm from each edge as indicated in the examples below.

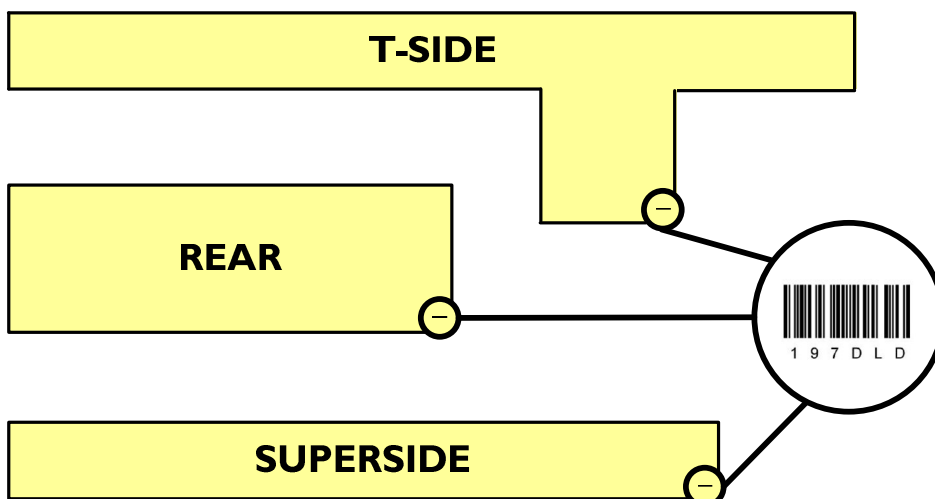

If printing the barcode in the position indicated interferes with your client's creative copy, feel free to re-position the barcode but please keep it 50mm from any edge and as near to the bottom right-hand corner as possible on all T-Sides and Supersides.

Reprints

If you are reprinting posters used on a previous campaign, you do not require a new barcode; however, you must contact CBS Outdoor Customer Service on 020 7482 3000 and inform them of the barcode that you are printing.

XL Passenger Panels, Super Headliners, Bus Passenger Panels (Portrait) and Bus Passenger Panels

These are smaller site types that are viewed at close quarters but will still require a barcode. To lessen the impact of the barcode you can print it at half the normal depth but do not alter the width. See the examples below.

Full size



1 9 7 D L D

Half depth



1 9 7 D L D

The barcode for each campaign can be provided at any time but will be issued automatically at the time of booking with the **Confirmation of Order**.

All CBS Outdoor bus campaigns must be barcoded.

Should you have any questions or require further information, please contact either **CBS Outdoor Customer Service** or **CBS Outdoor Production** on 020 7482 3000.